


Hydraulically Driven Gas Boosters




HiFluid Hydraulically Driven Gas Boosters

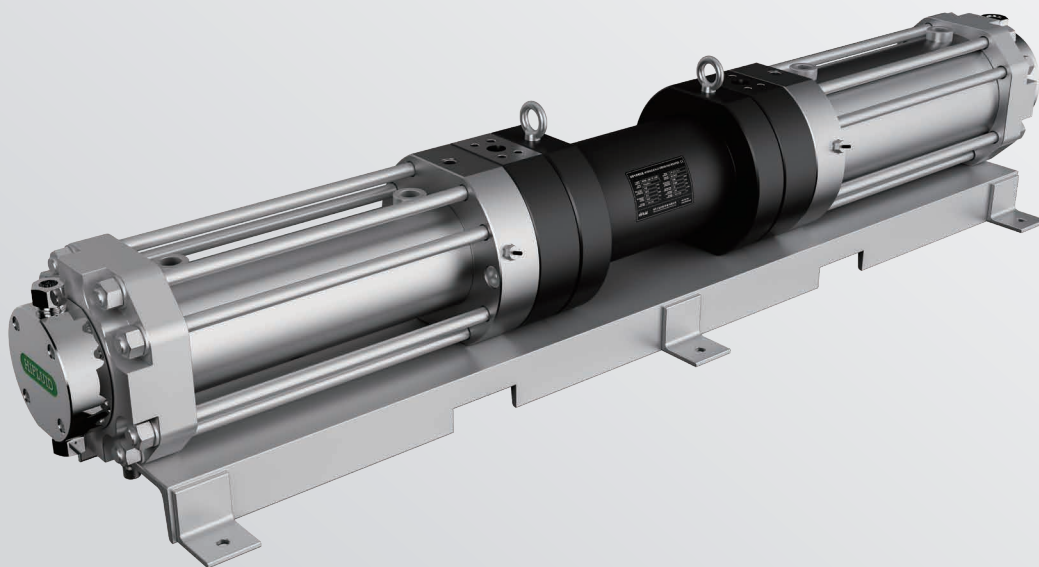

HiFluid offers a comprehensive product portfolio, delivering suitable solutions for a wide range of applications worldwide.

Our hydraulically driven gas boosters use low-pressure hydraulic oil as the driving source to compress gases to the required pressure. The standard design supports a maximum working pressure of 1200 bar, with customized solutions available for higher pressure requirements.

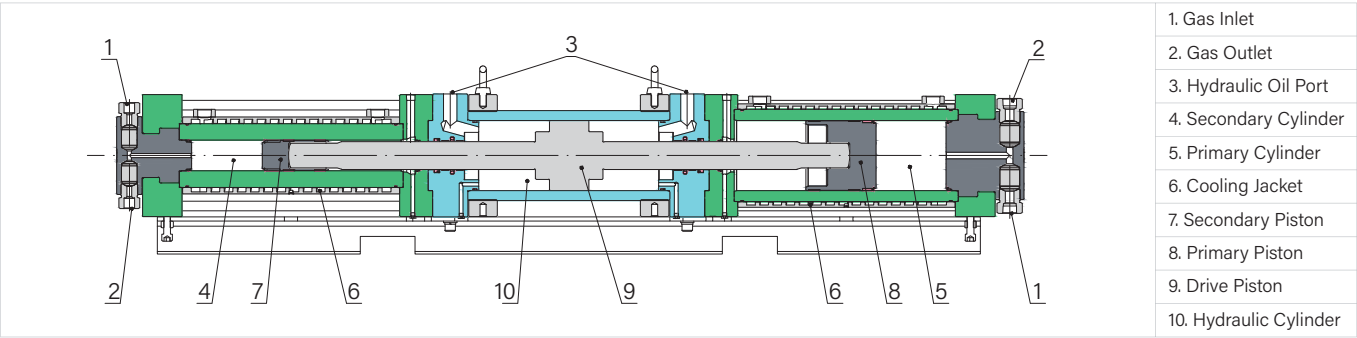


Key Advantages

- Specially designed for high-pressure gas applications; compatible with multiple gases.
- Hydrogen-compatible: materials used in hydrogen-contacting parts provide excellent resistance to embrittlement.
- Robust construction, ideal for frequent start-stop operations and continuous heavy-duty duty cycles.
- Special structure for both drive and compression ends to prevent gas contamination.
- Spiral-guided cooling design ensures uniform and efficient heat dissipation.
- Superior main sealing performance, oil-free lubrication, and extended service life.
- Maintenance-friendly design, significantly reducing seal replacement time.
- Modular design with flexible configurations and diverse options.
- Flow continuously adjustable from 0% to 100%.
- Suitable for explosion-proof environments.


Typical Applications

- **Leak Testing** – Supplies high-pressure gas for airtightness tests to detect leaks in components.
- **Hydrogen Refueling** – Provides high-flow, contamination-free hydrogen filling into vessels, equipment, or systems to the required pressure.
- **Airbag Inflation** – Charges helium/argon mixed gases into airbag inflators.
- **Gas-Assisted Molding** – Provides high-pressure, high-flow gas to improve molding processes and product quality.
- **Hot Isostatic Pressing (HIP)** – Pressurizes inert gas for HIP furnaces to achieve superior material performance.
- **Chemical Production** – Multi-stage pressurization of ethylene for polymerization in batch and tubular reactors.

Structural Types




Single-Stage Double-Acting
Each cycle delivers two compressions at a single ratio, ensuring continuous high-flow output.



Double-Stage Single-Acting
Each cycle delivers a single compression at double ratio, achieving high output pressure even with low inlet pressure.

Type Coding

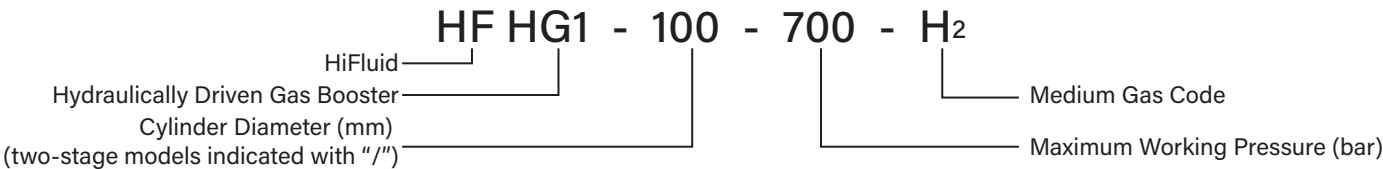

Product Parameters

Type	Model	Pressure Ratio	Displacement /Cycle(ml)	Pressure Limit						15 times per minute typical flow rate reference				
				Max. Outlet Pressure		Min. Inlet Pressure		Min. Outlet Pressure		Inlet Pressure		Outlet Pressure		Flow Rate Nm³/h
				bar	psi	bar	psi	bar	psi	bar	psi	bar	psi	
Single-Stage Double-Acting	HFHG1-160-350	1:0.8	12868	350	5075	3.4	50	350	5075	55	797.5	220	3190	496
	HFHG1-100-700	1:2.1	5026	700	10150	3.4	50	700	10150	100	1450	450	6525	339
	HFHG1-70-1200	1:4.4	2463	1200	17400	3.4	100	1200	17400	420	6090	900	13050	651
Double-Stage Single-Acting	HFHG1-160/100-700	1:0.8/1:2.1	6434	700	10150	6.9	50	350	5075	30	435	400	5800	135
	HFHG1-160/70-1200	1:0.8/1:4.4	6434	1200	17400	3.4	50	350	5075	40	580	900	13050	180
	HFHG1-100/70-1200	1:2.1/1:4.4	2513	1200	17400	3.4	50	700	10150	80	1160	900	13050	136

Installation Dimensions

Type	Model	Connection Interface			Dimensions(mm)					Weight (kg)
		Drive Port	Medium Inlet	Medium Outlet	A	B	C	D	E	
Single-Stage Double-Acting	HFHG1-160-350	SAE flange1 1/4" 6000PSI	NPT 1"	NPT 1"	2074	440	430	1005	1005	620
	HFHG1-100-700	SAE flange1 1/4" 6000PSI	MP 3/4"	MP 3/4"	2074	440	430	1005	1005	600
	HFHG1-70-1200	SAE flange1 1/4" 6000PSI	MP 3/4"	MP 3/4"	2060	440	430	1001	1001	580
Double-Stage Single-Acting	HFHG1-160/100-700	SAE flange1 1/4" 6000PSI	NPT 1"	MP 3/4"	2074	440	430	1005	1005	610
	HFHG1-160/70-1200	SAE flange1 1/4" 6000PSI	NPT 1"	MP 3/4"	2067	440	430	1001	1005	600
	HFHG1-100/70-1200	SAE flange1 1/4" 6000PSI	MP 3/4"	MP 3/4"	2067	440	430	1001	1005	590

